

# CSHV SERIES

005999  
Issue 1

## Open Loop Current Sensors

### DESCRIPTION

The CSHV Series are open loop current sensors that use Hall-effect sensing and patented Honeywell technology to bring the best combination of performance and reliability for current sensing applications.

These products are non-intrusive and electrically isolated from the monitored circuit. This ensures a simple and reliable structure without loss of power to the monitored circuit. They are rated for a primary current measurement range of  $\pm 100$  A to  $\pm 1200$  A DC.

### CUSTOMIZATION

The CSHV Series may be customized to best meet specific application needs. Solutions may be tailored to exact specifications for improved time to market, lower total system costs, and enhanced reliability.

Honeywell provides global technical assistance and engineering/service support.

### DIFFERENTIATION

- **Accuracy:** Hall-effect sensing and stable amplification circuitry for improved accuracy over the full operating temperature range.
- **Magnetic immunity:** Optimized magnetic circuit allows for excellent performance in diverse magnetic environments.
- **Flexible:** Customizable to meet specific application requirements.

### VALUE TO CUSTOMERS

- **Accurate:** Designed to enable precise battery state measurement for improved user experience.
- **Ease of use:** Magnetic immunity allows for easy integration into different magnetic environments.
- **Easy system integration:** Analog voltage output may be used by battery management system.

### POTENTIAL APPLICATIONS

- Current measurement for battery management systems in electrified vehicles (EV, HEV, PHEV, BEV)
- Current leakage detection and fault isolation in battery charging systems
- Current measurement in energy storage systems
- Fault detection in heavy industrial equipment



### FEATURES

- Active open loop current sensing using Hall-effect technology
- High accuracy and low temperature drift
- Operating temperature of  $-40^{\circ}\text{C}$  to  $125^{\circ}\text{C}$  [ $-40^{\circ}\text{F}$  to  $257^{\circ}\text{F}$ ]
- Analog voltage output
- CE certification; REACH and RoHS compliant



### PORTFOLIO

Honeywell offers a variety of current sensors for potential use in many applications. To view the entire product portfolio, [click here](#).

**Honeywell**

# OPEN LOOP CURRENT SENSORS CSHV SERIES

**TABLE 1. ABSOLUTE MAXIMUM RATINGS**

| CHARACTERISTIC                    | SYMBOL        | UNIT | PARAMETER |      |      | CONDITION                         |
|-----------------------------------|---------------|------|-----------|------|------|-----------------------------------|
|                                   |               |      | MIN.      | TYP. | MAX. |                                   |
| Supply voltage max.               | $V_{S\max}$   | V    | —         | —    | 10   | —                                 |
| Reverse supply voltage max.       | $V_{R\max}$   | V    | -0.3      | —    | —    | —                                 |
| Output voltage max.               | $V_{OUT\max}$ | V    | -0.3      | —    | 10   | $V_{OUT}$ reverse/forward voltage |
| Output current max.               | $I_{OUT\max}$ | mA   | -10       | —    | 10   | —                                 |
| Ambient storage temperature       | —             | °C   | -40       | —    | 125  | —                                 |
| Electrostatic discharge voltage   | $V_{ESD}$     | kV   | —         | —    | 8    | —                                 |
| RMS voltage for AC isolation test | $V_{Dwv}$     | kV   | —         | —    | 2.5  | 50 Hz, 1 min                      |
| Creepage distance                 | $d_{cp}$      | mm   | 4.9       | —    | —    | —                                 |
| Clearance                         | $d_{cl}$      | mm   | 4.9       | —    | —    | —                                 |
| Comparative tracking index        | CTI           | —    | PLC3      | —    | —    | —                                 |

**TABLE 2. OPERATING CHARACTERISTICS IN NOMINAL RANGE ( $I_{PN}$ )**

| CHARACTERISTIC                               | SYMBOL          | UNIT          | PARAMETER                                    |               |          | CONDITION                                      |
|--|-----------------|---------------|--|---------------|----------|--|
|  |                 |               | MIN.   | TYP.          | MAX.     |  |
| Primary current, nominal DC                  | $I_{PN}$        | A             | $-I_{PN}$                                    | —             | $I_{PN}$ | $\pm 100$ A to $\pm 1200$ A                    |
| Supply voltage                               | $V_S$           | V             | 4.5  | 5             | 5.5      | —  |
| Ambient operating temperature                | —               | °C            | -40  | —             | 125      | —  |
| Output voltage                               | $V_{OUT}$       | V             | $V_{OUT} = \frac{V_S}{5} (G * I_P + V_{OS})$ |               |          | $I_P = (V_{OUT} * \frac{5}{V_S} - V_{OS}) / G$ |
| Sensitivity                                  | G               | mV/A          | —  | $2000/I_{PN}$ | —        | $T_A = 25^\circ\text{C}$                       |
| Output voltage (at $I_P = 0$ )               | $V_{OS}$        | V             | —  | 2.5           | —        | —  |
| Current consumption                          | $I_{SUPPLY}$    | mA            | —  | 13            | —        | $T_A = 25^\circ\text{C}, V_S = 5$ V            |
|  |                 |               | —  | —             | 16       |  |
| Load resistance                              | $R_L$           | Ohm           | 10k  | —             | —        | —  |
| Output impedance                             | $R_{out}$       | Ohm           | —  | 1             | 10       | $T_A = 25^\circ\text{C}$                       |
| Ratiometric error                            | $\epsilon_r$    | %             | —  | $\pm 0.5$     | —        | —  |
| Sensitivity error                            | $\epsilon_g$    | %             | —  | $\pm 0.6$     | —        | $T_A = 25^\circ\text{C}, V_S = 5$ V            |
| Electrical offset voltage                    | $V_{OS, ELECT}$ | mV            | —  | $\pm 3$       | —        | $T_A = 25^\circ\text{C}, V_S = 5$ V            |
| Magnetic offset voltage                      | $V_{OS, MAG}$   | mV            | —  | $\pm 2$       | —        | $T_A = 25^\circ\text{C}, V_S = 5$ V            |
| Linearity error (% of full scale output)     | $\epsilon_L$    | %             | -1   | —             | 1        | —  |
| Average temperature coeff of $V_{OS, ELECT}$ | —               | mV/°C         | —  | $\pm 0.04$    | —        | —  |
| Average temperature coeff of G               | —               | %/°C          | —  | $\pm 0.02$    | —        | —  |
| Step response time (10% to 90%)              | $t_r$           | $\mu\text{s}$ | —  | 2             | 6        | —  |
| Frequency bandwidth (-3 dB)                  | BW              | kHz           | 45   | —             | —        | —  |
| Output RMS noise (RMS)                       | —               | mV            | —  | —             | 2        | —  |

<sup>1</sup> See Table 5 for catalog listing specifics.

# OPEN LOOP CURRENT SENSORS CSHV SERIES

**TABLE 3. OVERALL ACCURACY**

| $I_p$ (A) | $T_A = 25^\circ\text{C}, V_s = 5\text{ V}$ |                       |              | $-40^\circ\text{C} < T_A < 125^\circ\text{C}, V_s = 5\text{ V}$ |                      |              |
|-----------|--|-----------------------|--------------|---|----------------------|--------------|
|           |  |                       |              |   |                      |              |
| $-I_{PN}$ | $\pm 20\text{ mV}$                         | $\pm 1\% * I_{PN}$    | $\pm 1.00\%$ | $\pm 40\text{ mV}$  | $\pm 2\% * I_{PN}$   | $\pm 2.00\%$ |
| 0         | $\pm 7\text{ mV}$                          | $\pm 0.35\% * I_{PN}$ | $\pm 0.35\%$ | $\pm 10\text{ mV}$  | $\pm 0.5\% * I_{PN}$ | $\pm 0.5\%$  |
| $I_{PN}$  | $\pm 20\text{ mV}$                         | $\pm 1\% * I_{PN}$    | $\pm 1.00\%$ | $\pm 40\text{ mV}$  | $\pm 2\% * I_{PN}$   | $\pm 2.00\%$ |

**TABLE 4. MECHANICAL CHARACTERISTICS**

| CHARACTERISTIC              | DESCRIPTION           |
|-----------------------------|-----------------------|
| Housing material            | PBT + GF30%           |
| Mounting screw              | M4, 2,5 N torque max. |
| Mating electrical connector | TE MPN 1473672-1      |
| Weight                      | 58 g                  |

**TABLE 5. ORDER GUIDE**


| CATALOG LISTING | MEASURE RANGE (A) | SENSITIVITY (mV/A at $V_s = 5\text{ V}$ ) | OFFSET (mV at $V_s = 5\text{ V}$ ) |                       | ACCURACY (% at $V_s = 5\text{ V}$ ) |                       |
|-----------------|-------------------|---|------------------------------------|-----------------------|-------------------------------------|-----------------------|
|                 |                   |   | 25°C                               | -40°C to 85°C         | 25°C                                | -40°C to 85°C         |
| CSHV100A-001    | $\pm 100$         | 20  | $\pm 7\text{ mV}$                  | $\pm 25\text{ mV}$    | $\pm 1\%$                           | $\pm 2\%$             |
| CSHV200A-001    | $\pm 200$         | 10  |                                    | $\pm 15\text{ mV}$    |                                     |                       |
|                 |                   |   | <b>25°C</b>                        | <b>-40°C to 125°C</b> | <b>25°C</b>                         | <b>-40°C to 125°C</b> |
| CSHV300A-001    | $\pm 300$         | 6.667                                     | $\pm 7\text{ mV}$                  | $\pm 18\text{ mV}$    | $\pm 1\%$                           | $\pm 2\%$             |
| CSHV400A-001    | $\pm 400$         | 5   |                                    |                       |                                     |                       |
| CSHV500A-001    | $\pm 500$         | 4   |                                    |                       |                                     |                       |
| CSHV600A-001    | $\pm 600$         | 3.333                                     |                                    |                       |                                     |                       |
| CSHV700A-001    | $\pm 700$         | 2.857                                     |                                    |                       |                                     |                       |
| CSHV800A-001    | $\pm 800$         | 2.5                                       |                                    |                       |                                     |                       |
| CSHV900A-001    | $\pm 900$         | 2.222                                     |                                    |                       |                                     |                       |
| CSHV1000A-001   | $\pm 1000$        | 2   |                                    |                       |                                     |                       |
| CSHV1100A-001   | $\pm 1100$        | 1.818                                     |                                    |                       |                                     |                       |
| CSHV1200A-001   | $\pm 1200$        | 1.667                                     |                                    |                       |                                     |                       |

# OPEN LOOP CURRENT SENSORS CSHV SERIES

FIGURE 1. NOMENCLATURE

| CS                    | H                              | V                             | 1200               | A                    | 001               |
|-----------------------|--------------------------------|-------------------------------|--------------------|----------------------|-------------------|
| Type                  | Principle                      | Use                           | Rated Current      | Output Configuration | Version           |
| <b>Current Sensor</b> | <b>H</b> Hall-effect open loop | <b>V</b> Vehicle applications | <b>100</b> 100 A   | <b>A</b> One channel | <b>001</b> ASIC 1 |
|                       |                                |                               | <b>200</b> 200 A   |                      |                   |
|                       |                                |                               | <b>300</b> 300 A   |                      |                   |
|                       |                                |                               | <b>400</b> 400 A   |                      |                   |
|                       |                                |                               | <b>500</b> 500 A   |                      |                   |
|                       |                                |                               | <b>600</b> 600 A   |                      |                   |
|                       |                                |                               | <b>700</b> 700 A   |                      |                   |
|                       |                                |                               | <b>800</b> 800 A   |                      |                   |
|                       |                                |                               | <b>900</b> 900 A   |                      |                   |
|                       |                                |                               | <b>1000</b> 1000 A |                      |                   |
|                       |                                |                               | <b>1100</b> 1100 A |                      |                   |
|                       |                                |                               | <b>1200</b> 1200 A |                      |                   |

FIGURE 2. DIMENSIONAL DRAWINGS (FOR REFERENCE ONLY: MM/IN)

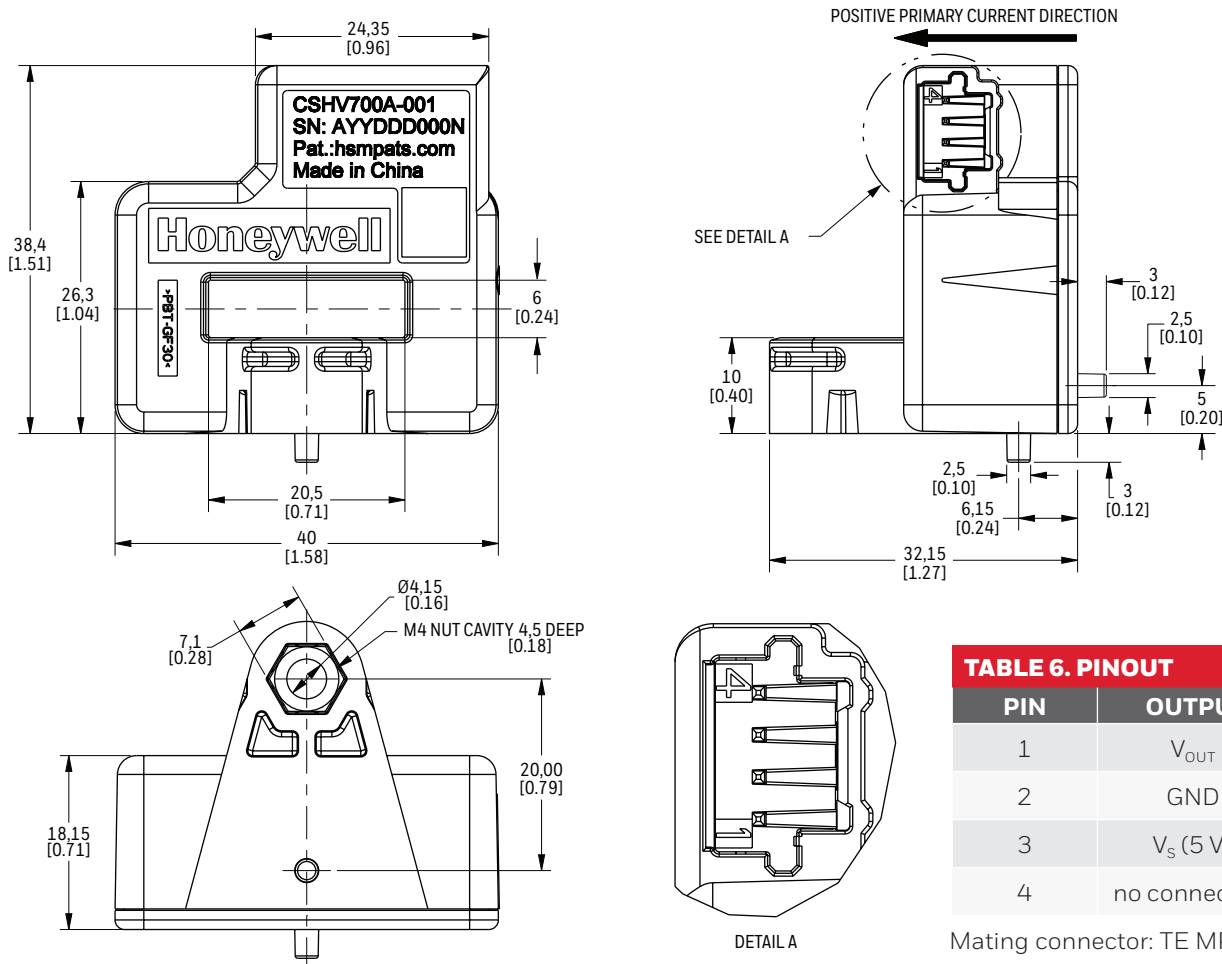

# OPEN LOOP CURRENT SENSORS CSHV SERIES

FIGURE 3. PART MARKING DETAILS


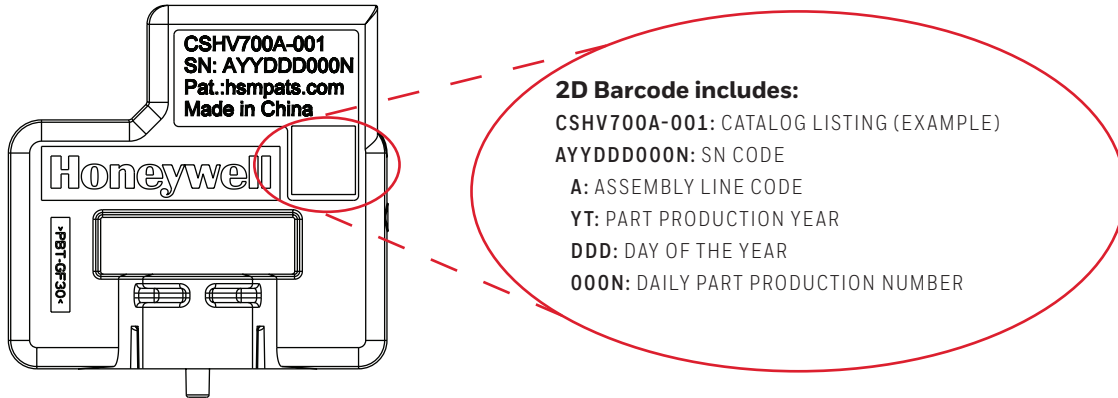


FIGURE 4. ELECTRICAL DIAGRAM

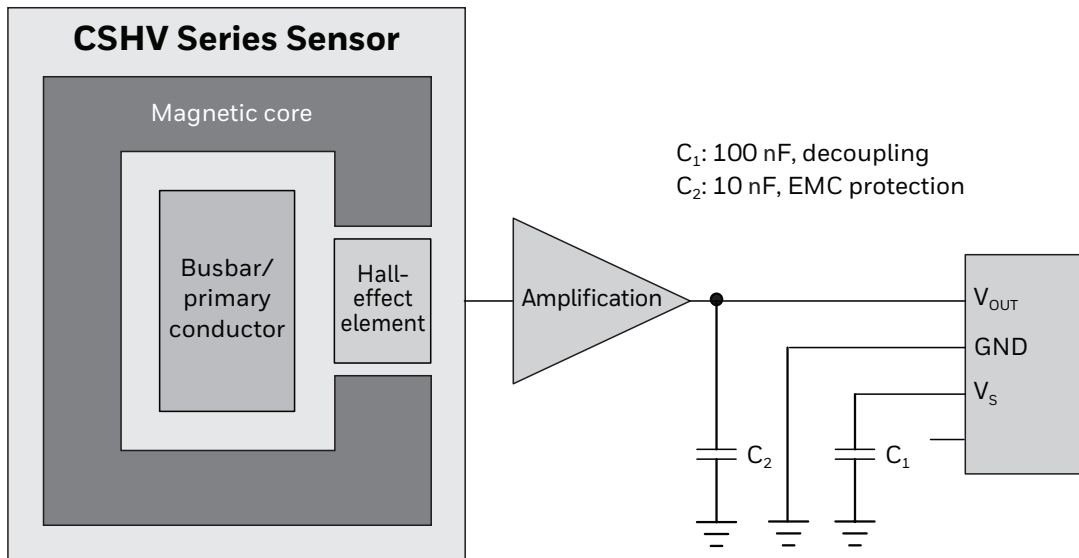

## NOTICE

### SENSOR ACCESSIBILITY

- Ensure that the current sensor is installed in a suitable electrical enclosure that is only accessible with the use of special tools.

## ADDITIONAL MATERIALS

The following associated literature is available at [sps.honeywell.com/ast](https://sps.honeywell.com/ast):

- Product range guide
- Installation drawings

## WARRANTY/REMEDY

Honeywell warrants goods of its manufacture as being free of defective materials and faulty workmanship during the applicable warranty period. Honeywell's standard product warranty applies unless agreed to otherwise by Honeywell in writing; please refer to your order acknowledgment or consult your local sales office for specific warranty details. If warranted goods are returned to Honeywell during the period of coverage, Honeywell will repair or replace, at its option, without charge those items that Honeywell, in its sole discretion, finds defective.

**The foregoing is buyer's sole remedy and is in lieu of all other warranties, expressed or implied, including those of merchantability and fitness for a particular purpose. In no event shall Honeywell be liable for consequential, special, or indirect damages.**

While Honeywell may provide application assistance personally, through our literature and the Honeywell web site, it is buyer's sole responsibility to determine the suitability of the product in the application.

Specifications may change without notice. The information we supply is believed to be accurate and reliable as of this writing. However, Honeywell assumes no responsibility for its use.

## WARNING PERSONAL INJURY

DO NOT USE these products as safety or emergency stop devices or in any other application where failure of the product could result in personal injury.

**Failure to comply with these instructions could result in death or serious injury.**

## WARNING MISUSE OF DOCUMENTATION

- The information presented in this product sheet is for reference only. Do not use this document as a product installation guide.
- Complete installation, operation, and maintenance information is provided in the instructions supplied with each product.

**Failure to comply with these instructions could result in death or serious injury.**

## FOR MORE INFORMATION

Honeywell services its customers through a worldwide network of sales offices and distributors. For application assistance, current specifications, pricing or the nearest Authorized Distributor, visit our [website](https://www.honeywell.com) or call:

|               |                     |
|---------------|---------------------|
| USA/Canada    | +1 302 613 4491     |
| Latin America | +1 305 805 8188     |
| Europe        | +44 1344 238258     |
| Japan         | +81 (0) 3-6730-7152 |
| Singapore     | +65 6355 2828       |
| Greater China | +86 4006396841      |

## Honeywell Advanced Sensing Technologies

830 East Arapaho Road  
Richardson, TX 75081  
[sps.honeywell.com/ast](https://sps.honeywell.com/ast)